


TCE 4295

Damage-Free Wheel Service Made Easier and More Affordable



BOSCH

Invented for life

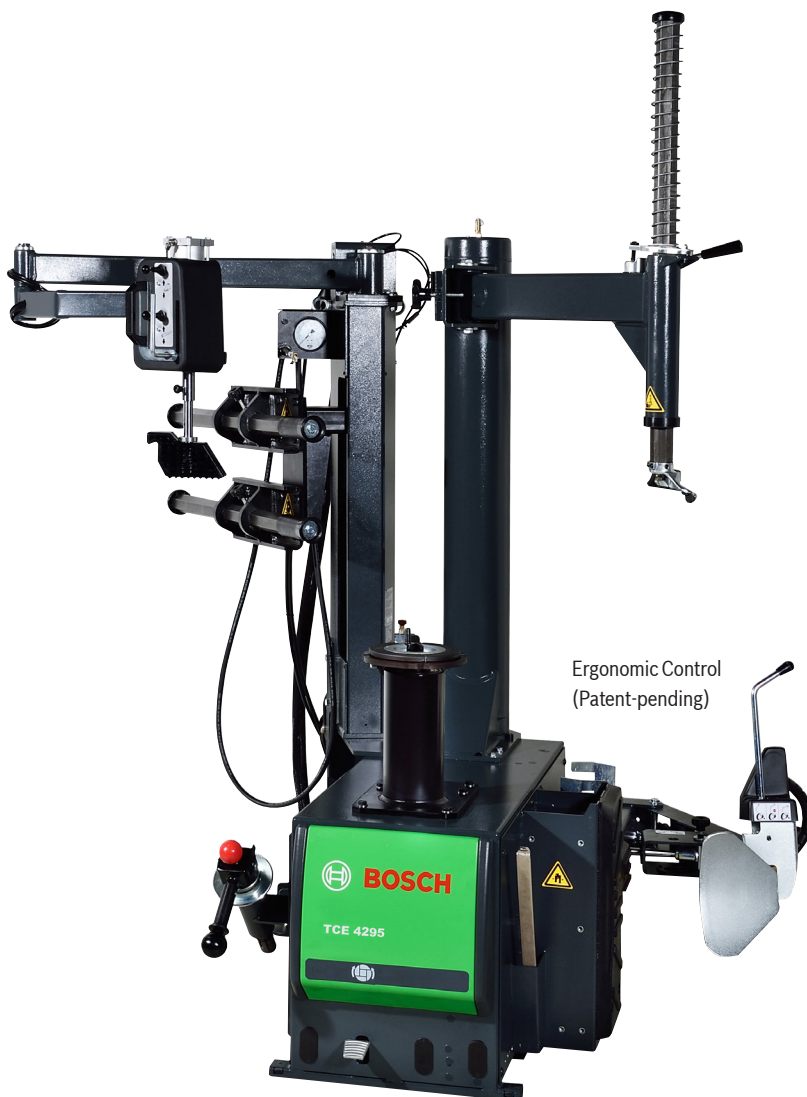


Bosch Tire Changers Engineered Smart

Bosch introduces a new innovative tire changer which combines the familiarity of a traditional swing-arm with the versatility of a modern center-post, capable of safely and efficiently handling virtually any wheel combination for both passenger and light truck vehicles.

- ▶ **Center-post Clamping** – Robust Center-Post allows for a wide range of application and effortless locking with the innovative “Smart Lock” center locking system.
 - New Smart Lock designed to be quick, precise and easy to use.
 - Virtually eliminates damage to problematic plastic-clad wheels.*
 - Greatly reduced clamping time compared to external clamping on rim clamp machine.
- ▶ **Larger Clamping Capacity** – Maximum wheel capacity of 32" diameter and 15" width.
- ▶ **Increased Rigidity** – The new G-Frame Concept provides extreme rigidity which greatly reduces mount/demount flexion virtually eliminating damage to wheels and tire.
- ▶ **2-Speed Rotation (Electric only)** – The pedal controlled 2-speed rotation allows for exact torque when needed.
 - Ultimate control during operation.
 - Work faster on average sized tires and delicately on challenging wheel and tire combinations.
- ▶ **Ergonomic Control for Bead Breaking** – The hand actuated bead breaker provides the operator with more precise control of the shovel during the bead breaking process.
- ▶ **Helper Assembly** – Standard configuration includes independently operated bead press device and dual-height bead rollers for the ultimate combination of assistance when servicing challenging wheel assemblies.
- ▶ **Boost Inflation System** – Hand-held bead blaster designed for faster bead seating.

*With the use of the optional Clad/Reverse mount adapter.

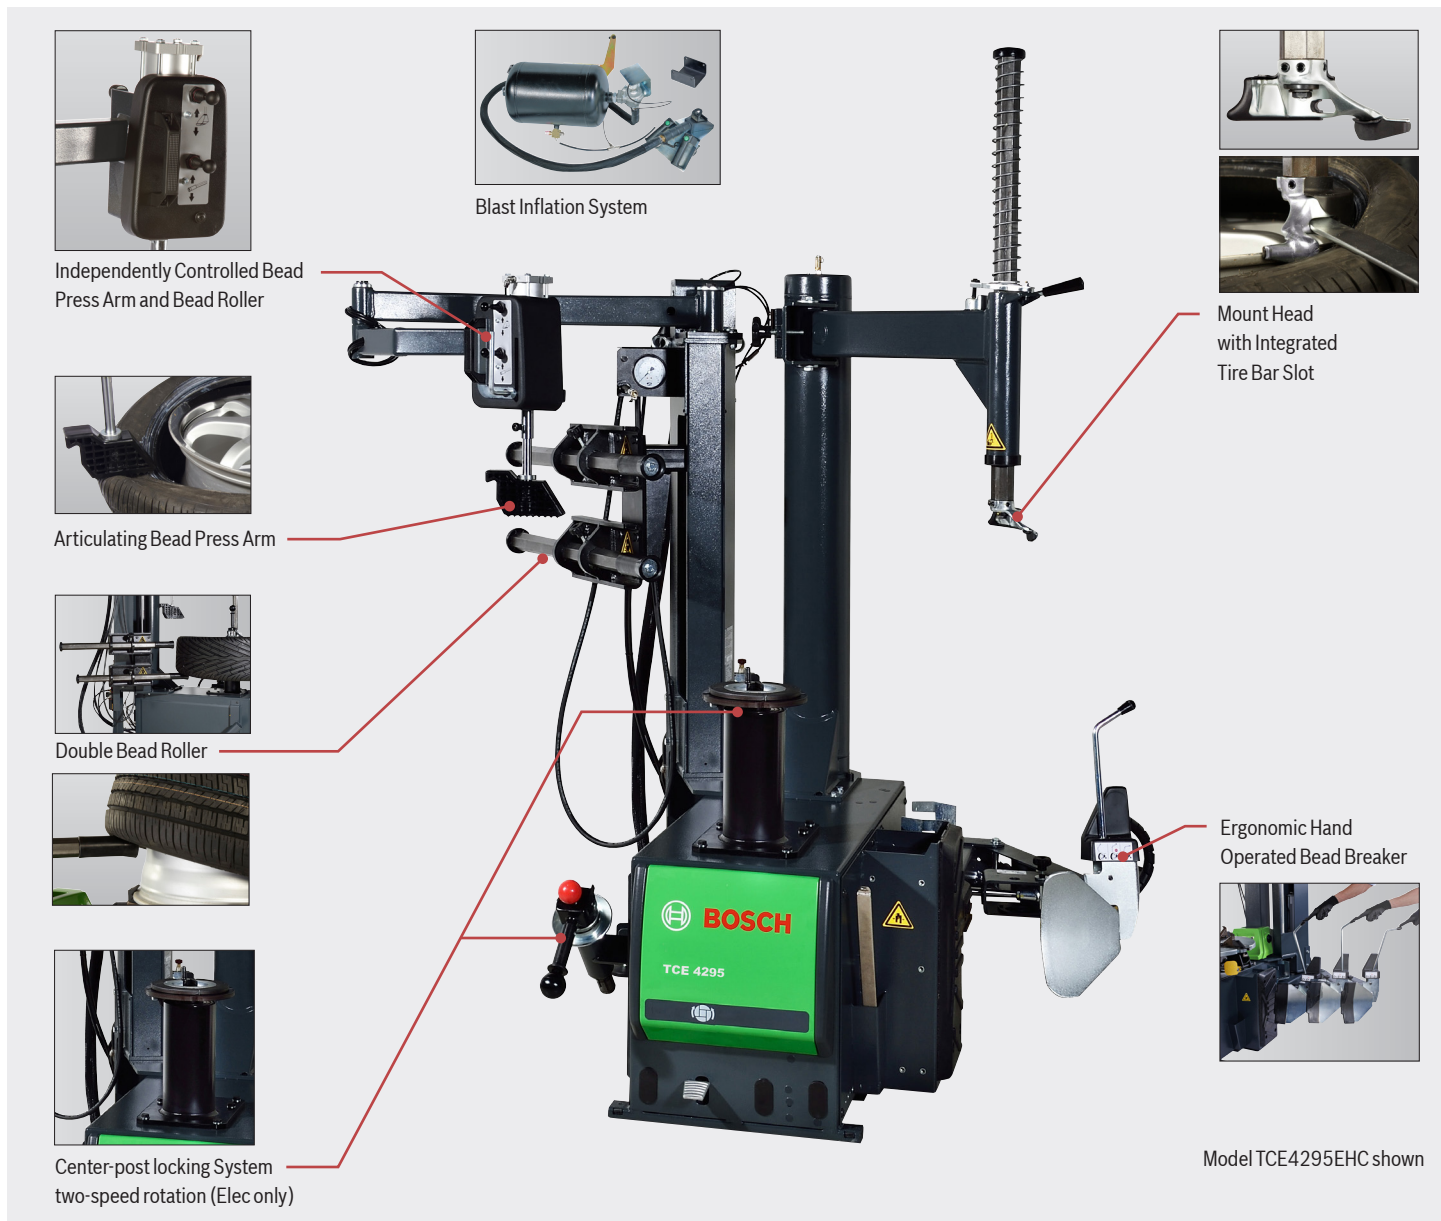

Available Models

TCE4295EHC	2 Speed Electric Centerpost w/ Helper assembly & ERGO bead Breaker
TCE4295AHC	Air Motor Centerpost w/ Helper assembly & ERGO bead Breaker

Specifications:

- ▶ Clamping capacity 12" - 32"
- ▶ Maximum wheel width..... 15" (Depending on wheel offset)
- ▶ Maximum wheel/tire Diameter 47" (Depending on tire width)
- ▶ Rotation..... 2-speed 7-15 RPM (Electric only)
- ▶ Bead Breaking force 8500 ft/lbs
- ▶ Power Requirement 110v 20A NEMA L5-20P (Electric only)
- ▶ Foot Print 6'9" H x 4'5" W x 4'8" D
- ▶ Warranty..... 3-years parts & labor

Recommended Accessories

	1695108195 Light Truck Kit 4.8"-8.8"
	1695108196 Clad Wheel/Reverse Mount Adapter Kit

Scan here for more information on the TCE 4295

