

# ALL-NEW TRANSMISSION JACKS

UNIVERSAL SADDLES, ADJUSTABLE CORNER BRACKETS AND SAFETY CHAINS

ASME PASE-2019 tested with limited lifetime warranty



**TJH10**  
1,000-lb capacity high-lift transmission jacks

- Head tilts front to back and side to side to make removal and installation of transmission and driveline components easier
- Hydraulic system features flash-chromed rams to prevent rust from entering the system, prolonging jack life
- A foot-operated pump and lowering pedal allow for ease of control when positioning or removing a transmission



**TJHP10**  
Air/hydraulic 1,000-lb capacity high-lift transmission jack

- Foot pedals control the air operation, which lifts the head quickly
- A hand pump secondary hydraulic stage allows for precise operator control
- Specially designed with a wide leg base and oversize 5" polyurethane swivel wheels for smooth maneuvering over rough surfaces and small debris, while providing stability and easy placement during jobs



**TJHP15**  
Air-assisted 1,500-lb capacity high-lift transmission jack

- Rugged wall tubing and oversized base add strength and stability for any transmission job
- Foot-operated air pump controls the air-powered hydraulic operation, which lifts the head quickly and effortlessly to the work location
- Big, easy-to-grip knobs make mounting head adjustments simple, and the included safety chains securely hold components during removal, transport and installation

**Transmission jack specs**

Lift	Min height	Max height	Tilt, forward	Tilt, backward	Tilt, side/side	Wheel size	Air pressure
<b>TJH10</b>	35"	71-5/8"	24°	19°	20°	4"	N/A
<b>TJHP10</b>	37-5/8"	76-1/2"	50°	38°	14°	5"	100 PSI
<b>TJHP15</b>	41-1/2"	65"	50°	38°	14°	4"	80 – 140 PSI

**TJH10, TJHP10 and TJHP15 are fully compatible with OTC transmission jack adapters**



**1870**

**Universal transmission adapter**

- Universal fit features four independently adjustable and movable indexing, locking arms
- Adapts to most high or low-lift transmission jacks.
- 400-lb maximum capacity




**1797**

**Heavy-duty clutch adapter**

- Adapter allows high or low-lift transmission jacks to handle heavy-duty clutch assemblies
- Expands use of your transmission jack; accepts optional splined shaft adapters – 545765, 48596, 48625, 440533 and 600011.
- Includes safety strap to securely hold clutch when moving or working



1797 adapter shown on TJHP15; jack not included

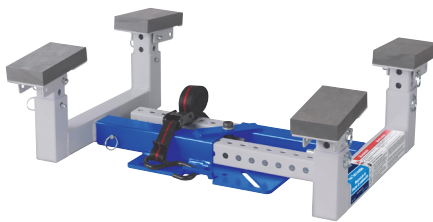

**1758**

**Fuel tank handler**

- Universal adapter plate and adjustability holds tanks up to 40 gallons
- Unique gearing holds load evenly to balance load over jack
- Heavy-duty foam-covered risers protect tanks and are individually adjustable
- Fits most transmission jacks



600011 shown

**Optional splined shaft adapters**

- 545765** – Splined Shaft Adapter, 10 spline, 2" OD, 1.18" Pilot
- 48596** – Splined Shaft Adapter, 10 spline, 2" OD, 1.08" Pilot
- 48625** – Splined Shaft Adapter, 10 spline, 1-3/4" OD, 1.18" Pilot
- 440533** – Splined Shaft Adapter, 10 spline, 1-3/4" OD, 1" Pilot
- 600011** – Splined Shaft Adapter, 14 Spline, 2" OD, 1.18" Pilot