


HEAVY-DUTY WHEEL RAMPS FOR VEHICLES UP TO 20 TONS

UP TO 16" WIDTH TO HANDLE SEMI-TRUCKS, CEMENT TRUCKS,
GARBAGE TRUCKS AND MORE



TR2010

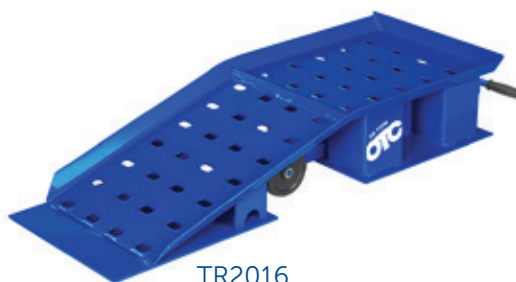

TR2016

TR2010 AND TR2016 WIDE 20-TON TRUCK RAMPS (SOLD AS A PAIR)

- 33" retractable T-handle make ramps easy to position in front of or behind vehicle
- Non-skid rubber matting prevents ramp from moving while loading and unloading
- Wheels lower when handle is extended to quickly maneuver and position ramps
- Wheels stow away when handle is retracted, preventing ramp movement
- Covered by OTC limited lifetime warranty

	TR2010 20-ton truck ramps	TR2016 20-ton wide truck ramps
Frame height	9-1/4" (23.5cm)	9-1/4" (23.5cm)
Frame width	13-1/2" (34.29cm)	18-1/4" (46.4cm)
Tread width	10" (25.4cm)	16" (40.6cm)
Frame length	47" (119.38cm)	47" (119.38cm)
Overall length	51" (129.54cm)	51" (129.54cm)
Wheel diameter	5" (12.7cm)	5" (12.7cm)
Handle length	33" (83.82cm)	33" (83.82cm)
Weight	230 lbs (104.3kg)	312 lbs (141.5kg)
Capacity	20 tons	20 tons
Applications	Semi-trucks, tractor-trailers and other heavy-duty vehicles with wheel widths less than 10"	Cement trucks, dump trucks, garbage trucks and vehicles with wider front wheels up to 16" wide