NEW

MEET THE NEW STANDS

Avoid crawling underneath vehicles to safely set a jack stand.

EST 1925 LIMITED LIFETIME WARRANTY

TESTED AND PASE VERIFIED

S03G



- Stepped saddle design supports frame rails evenly
- Available in 3 and 6-ton capacities
- Patented gearbox raises lifting arm keeping your hands out of the way
- Durable, baked enamel finish resists corrosion
- High-strength formed and welded base
- Welded foot pads resist sinking into soft ground or asphalt
- 50" extendable handle to remotely position stand

S06G



- Sold as a pair. Meets all the newest ASME PASE safety standards for jack stands
- S03G designed for utility vans, full size sedans, full size pickups and SUVs and other personal passenger vehicles.
- S06G designed for step vans, vocational trucks and smaller heavy-duty vehicles
- Pair with LDJ3-A, LDJ35, HDJ5, or HDJ5P for the most reliable equipment setup

	S03G	S06G
Capacity	3-ton	6-ton
Maximum height	17-11/16"	50"
Minimum height	12"	19"
Footprint	8-1/4" x 7-1/2" square base; welded foot pads	11-9/16" x 10-3/8" square base; welded foot pads
Adjustment	Geared	Geared
Saddle	V-notch style, 1" x 3.5"	V-notch style, 1.2" x 4.2"


EST 1925
LIMITED LIFETIME WARRANTY



LDJ35 Back



LDJ35 Side

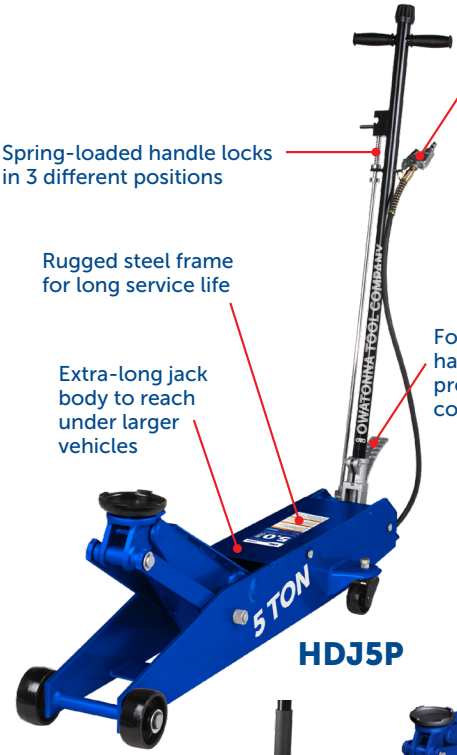

HDJ5P



HDJ5



LDJ3-A

	LDJ3-A	LDJ35	HDJ5P	HDJ5
Capacity	3-ton	3.5-ton	5-ton air-assist	5-ton
Lifting range	5-3/4" to 18-1/2"	5.2" to 21.9"	5-7/8" to 22"	6" to 22"
Padded handle length	39-1/2"	50" spring-loaded padded lower handle	45.4" 3-position with lock and release controls, not padded	43" 3-position with lock and release controls, not padded
Footprint	13.4" x 24.5"	14.5" x 28.5"	14.2" x 55.5"	15" x 56"
Reach	63.9"	78.5"	87"	47"
Saddle	4" dia., steel crown	6" dia., flat steel, rubberized, pinned to lifting arm	5.1" dia., round	5-1/8" dia., round
Casters	4; 3.5" front fixed (2), 2.36" rear swivel (2)	4; 3.15" front fixed (2), 2.5" rear swivel (2)	4; 4.4" fixed front (2), 2.8" mid-body swivel (2)	4; 4.4" fixed front (2), 2.8" mid-body swivel (2)
Frame height	6.3"	6.25"	7.5"	7.9"